

MAGMA



TRUCK & BUS TYRE CATALOGUE

LONG HAUL



MA101T

MA102T

MA103D

MA104T

REGIONAL



MA201T

MA202A

MA203A

MA204A/+

MA205A/+

ON & OFF



MA301D/+

MA302D/+

MA303D

MINING




MA401D



MA101T


SUITABLE FOR MID-LONG DISTANCE
NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance formula design



Excellent water evacuation performance



Evenly distributes grounding pressure, irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	15.5	8.25	3000/2725	146/143	M	830
11R24.5	16PR	15.5	8.25	3250/3000	149/146	L	830
12R22.5	18PR	16.5	9.00	3550/3250	152/149	L	930
215/75R17.5	16PR	12.0	6.00	1750/1600	127/124	L	830
235/75R17.5	16PR	13.0	6.75	2000/1850	132/129	L	830
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830
255/70R22.5	16PR	13.0	7.50	2500/2300	140/137	L	830
275/70R22.5	16PR	15.0	8.25	3150/2900	148/145	M	900
295/60R22.5	18PR	16.0	9.00	3350/3075	150/147	L	900
295/75R22.5	16PR	15.0	9.00	3000/2725	146/143	L	830
295/80R22.5	18PR	15.5	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	L	900

TRAILER: 




MA102T

SUITABLE FOR MID-LONG DISTANCE
NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance and anti-wear formula design



Excellent water evacuation performance



Irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	14.5	9.00	3550/3250	152/149	M	900
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	M	900

TRAILER: 




MA104T


SUITABLE FOR MID-LONG DISTANCE
NATIONAL HIGHWAY TRANSPORTATION



Super excellent wear resistance



Low fuel consumption



Low heat of tread formula


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
385/65R22.5	20PR	16.7	11.75	4500	160	K	900

TRAILER: 



MA103D

SUITABLE FOR MID-LONG DISTANCE
NATIONAL HIGHWAY TRANSPORTATION



Low heat formula design



Good heat dissipation performance



Excellent control performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	20.0	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900

DRIVE: 



MA201T

SUITABLE FOR MID-LONG DISTANCE
NATIONAL HIGHWAY TRANSPORTATION



High mileage



Reinforced skeleton material design



Optimized tire grounding marks design prevents irregular wear

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
245/70R17.5	16PR	14.0	7.50	2000/1900	132/130	L	830
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830

TRAILER: 




MA203A

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Anti-clamping stone performance



Excellent durability



Crown explosion-proof performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	17.5	7.50	3250/3000	149/146	K	930
13R22.5	20PR	18.0	9.75	4000/3650	156/153	K	930

ALL POSITION: 



MA202A


SUITABLE FOR MID-LONG DISTANCE
NATIONAL HIGHWAY TRANSPORTATION



Good tread heat dissipation



Wide adaptability road surface



Strengthened body and bead design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
6.50R16LT	12PR	10.0	5.50F	1060/925	110/105	K	670
7.50R16LT	14PR	13.0	6.00G	1500/1320	122/118	L	770
8.25R16LT	16PR	14.0	6.50H	1800/1600	128/124	K	770
9.00R20	16PR	15.5	7.00	2800/2650	144/142	K	900
10.00R20	18PR	16.0	7.50	3250/3000	149/146	K	930
11.00R20	18PR	17.0	8.00	3550/3250	152/149	K	930
12.00R20	20PR	16.5	8.50	4000/3650	156/153	K	900
12.00R24	20PR	17.5	8.50	4500/4125	160/157	K	900
11R22.5	16PR	15.0	8.25	3000/2725	146/143	K	830
12R22.5	18PR	15.0	9.00	3550/3250	152/149	L	930
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	K	900

ALL POSITION:





MA204A/+


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent grip



Excellent durability and loading performance



Good heat dissipation on shoulder


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	16.5	8.50	4000/3650	156/153	K	900

ALL POSITION: 




MA205A/+

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent durability and loading performance




Anti-skid performance



Wide adaptability of road surface

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	930
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	930
12.00R20	20PR	17.0	8.50	4000/3650	156/153	K	900
12.00R20	20PR	17.0	8.50	4000/3650	156/153	K	900

ALL POSITION: 



MA301D/+


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent loading performance



Excellent driving performance



Anti-clumping stone performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
13R22.5	20PR	21.0	9.75	4000/3650	156/153	K	930
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930
12.00R20	20PR	21.0	8.50	4000/3650	156/153	K	900

DRIVE: 



MA302D/+


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent driving, braking performance



Good heat dissipation on shoulder



Strengthen the design of tire body and bead


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930

DRIVE: 



MA303D


SUITABLE FOR MINING AREA AND ROUGH ROADS
TRANSPORTATION

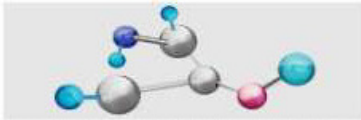

Excellent puncture resistance, cut and chip resistance



Excellent driving and braking performance

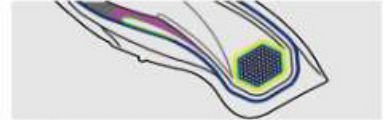

Excellent loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	25.0	8.50	4000/3650	156/153	D	900

DRIVE:




MA401D

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent cutting resistance, explosion-proof performance



Excellent loading performance



Strong driving force

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	26.0	8.50	4000/3650	156/153	D	900

ALL POSITION:



MAGMA

TMA
INTERNATIONAL
— TYRES —

info@tmatyres.com